




Description:

Backing ring for usage in Flexalen PB systems.

Technical details:

Material:	Cast iron, GRP (Glass fibre reinforced plastic) jacketed
Dimensions:	O.D. 25 – 225 mm
Nominal pressure:	PN16
PCD Pitch circle diameter:	PN10 (according DIN2501)
Assembly:	Flange connection without any special tool; usage of nuts, bolts and shims.

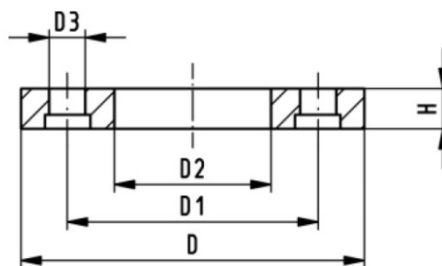

Product code	d [mm]	weight [kg]	D [mm]	D1 [mm]	D2 [mm]	D3 [mm]	H [mm]	NH	Bolt	Bolt torque [Nm]
GP-LOSF25-10	25	0.5	118	75	34	14	18	4	M12x 75	15
GP-LOSF32-10	32	0.5	122	85	42	14	17	4	M12x 75	15
GP-LOSF40-10	40	0.6	142	100	51	18	17	4	M16x 80	20
GP-LOSF50-10	50	0.8	156	110	62	18	19	4	M16x 85	25
GP-LOSF63-10	63	0.9	171	125	78	18	20	4	M16x 85	35
GP-LOSF75-10	75	1.2	191	145	92	18	21	4	M16x 90	40
GP-LOSF90-10	90	1.2	206	160	110	18	21	8	M16x 90	40
GP-LOSF110-10	110	1.5	226	180	133	18	22	8	M16x 95	50
GP-LOSF125-10	125	1.5	226	180	135	18	23	8	M16x 130	50
GP-LOSF160-10	160	2.5	296	240	178	22	28	8	M20x 140	60
GP-LOSF225-10	225	3.6	350	295	238	22	31	8	M20x 160	75